

M-901E draft gear

SL-76™

Heavy-duty protection. Superior energy management. Reduced component wear. Specially designed for extreme heavy-haul operations throughout the world.

- ◀ Maximize Wagon Protection
- ◀ Minimize Life Cycle Cost
- ◀ Reliable Performance
- ◀ Unmatched Experience

Maximum Protection.  
Unmatched Experience.



PERFECTING RAILCAR PERFORMANCE

# SL-76™

## M-901E RUBBER FRICTION DRAFT GEAR




### Friction Clutch

Amplifies the energy absorption of the rubber spring package. This combination results in exceptional car protection over time and service.

### Spring Package

Ultra-high capacity natural rubber spring package provides superior energy management and greater performance.

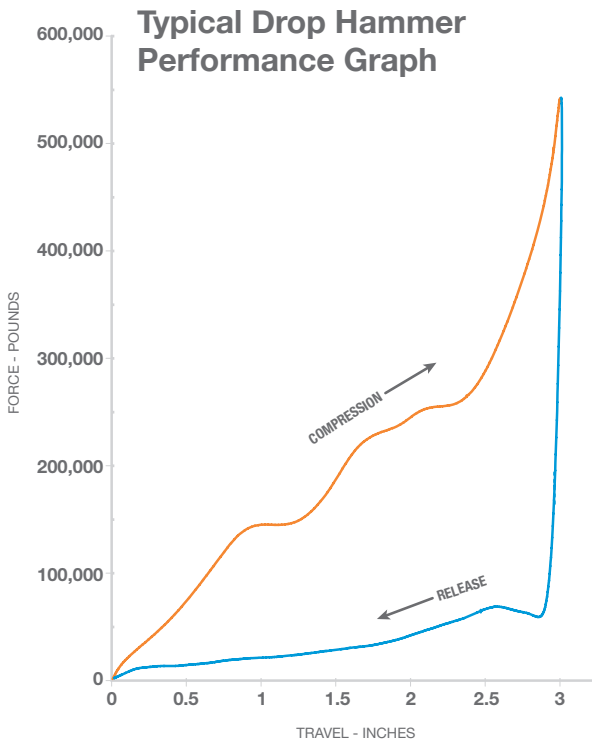

### Features

Official rating travel – inches	3.05
Official capacity – foot pounds	47,820
Reaction force at rating travel – lbs.	511,000
Maximum travel – inches	3.15
Capacity at maximum travel – foot pounds	53,900
Gear Weight – lbs.	314