

quad hopper
outlet gate line

AUTOLOK™ II



Unload slow-moving materials faster with Miner's 42x42 or 42x52 outlet gate.

Designed to unload dried distillers grain (DDG) and dried distillers grain with solubles (DDGS) with ease, the AutoLOK™ II improves commodity flow and minimizes the need to manually break up large clumps.

- ◀ DDG
- ◀ DDGS


Simple. Reliable. Proven.




PERFECTING RAILCAR PERFORMANCE

AUTOLOK™ II

QUAD HOPPER OUTLET GATE LINE

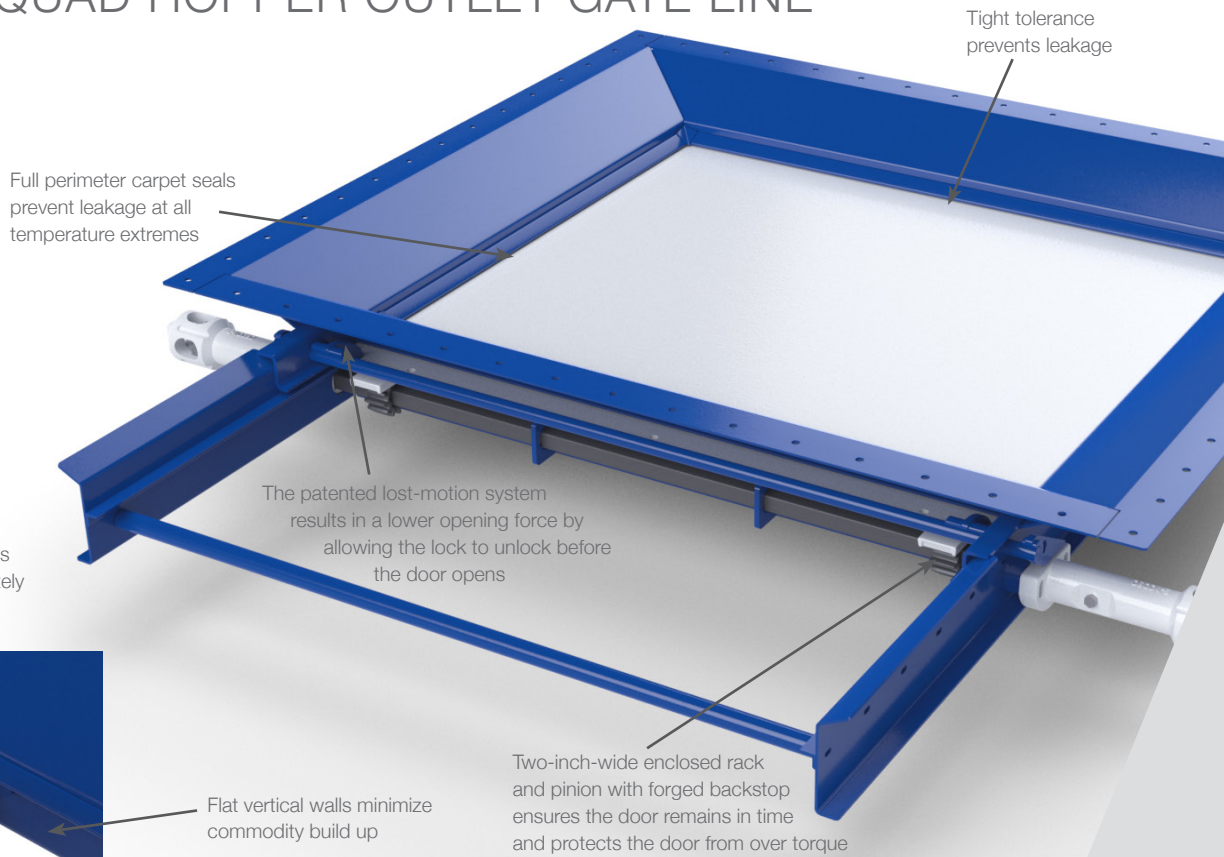


Tapered front end door supports allow the door to close completely before buildup can occur

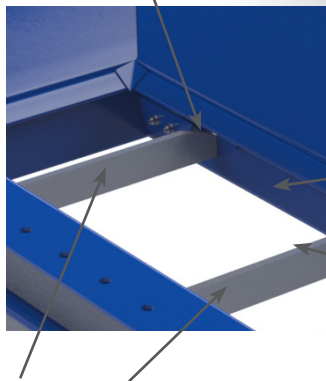


Flat vertical walls minimize commodity build up

Proven UHMW material on rigid door runners reduce friction for easier opening

Door runners ensure rack and pinion stay fully engaged for reliable opening and closing



42 x 42



42 x 52

Bolt on working points	49 7/8" x 47 7/8"	62 1/4" x 73 1/4"
Actual gate opening	43 5/16" x 41 5/16"	43 5/16" x 52"
Flange to flange height	8.69"	9.88"
Overall gate height	8.69"	9.88"
Number of bolt holes	66	60
Weight	580 lbs	715 lbs
Typical service	DDG / Dry Bulk / Soybean Meal	DDG / AAR S-233 Lightweight Commodity Service (LCS)